deFarang | kalklitir

LIME PLASTER · KALK PAINT



PRODUCT CATALOGUE

Materials for spaces that last.

2026

About deFarang

Rooted in nature, *growing into* the value of space.



deFarang speaks of the colour and texture unique to natural materials, and of finishes that deepen with time.

Rather than following trends, we pursue finishes that stay natural over time.

With an understanding of materials and years of experience, we are building a finishing culture of our own.

“Not spaces finished quickly,
but spaces you want to stay in.”

Brand Story

Since 2020

Korea's first lime plaster specialist brand
Lime plaster — lime paint

2020–21

Brand launch

Created the name “Yureop Mijang” (European plaster) and opened a showroom in Mangwon-dong · developed professional application methods · pioneered the DIY plaster market · 3 dealers

2022

Bringing lime plaster to the mainstream

Expanded to 10 dealers nationwide · featured on 3 major TV networks · launched YouTube channel “유럽미장TV”

2023

Incorporation and expansion

Incorporated as deFarang Co., Ltd. · HQ moved to larger premises in Yeonhui-dong · nationwide dealer network

2024

New line-up launched

Exclusive Korean distribution agreement for Kalkpaint with Kalklitir (Belgium) · Consumer Award winner

2025

Growing into a limewash specialist

Expanded into architecture & interiors ·
built the 1,000㎡ deFarang House headquarters · official review rating 4.9/5

2026

Cumulative sales of KRW 5.8 billion — a premium leap

Expanding dealers nationwide · launching deFarang Gallery & Studio · a stronger global presence

---

deFarang × kalk litir

Kalk Paint

Kalkpaint is a lime paint that Kalklitir, a Belgian family business, offers together with deFarang for DIY customers. Kalklitir has made powdered lime paint in Mol, Belgium, since 2008.

1st
Korea's first lime plaster specialist

19
Dealers nationwide

3
Featured on 3 major TV networks

Korea
Kalklitir official distributor for Korea

Contents

Material, texture and space



05 **deFarang Lime Plaster**
Lime Plaster




06 **Lime Plaster products**
Products




10 **Pigments & spaces**
Colour & Space



12 **Kalkpaint**
Limewash

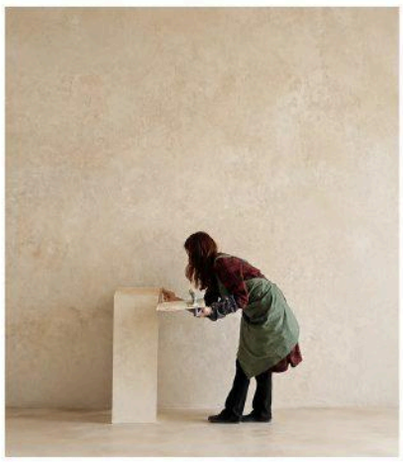

17 **Application steps**
How to

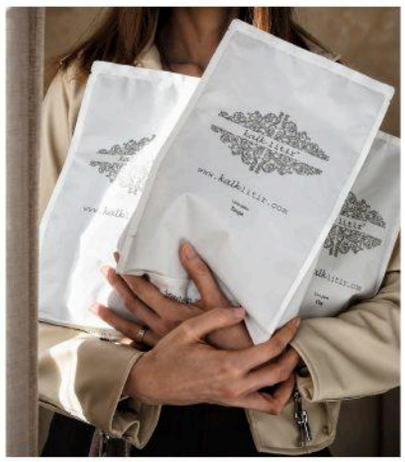

18 **Comparison & quantities**
Guide

Lime Plaster

Lime Plaster

A ready-mixed lime-based plaster. Applied 1–2mm thin with a trowel or brush, the movement of the hand and the grain become the wall's texture.

Limewash

Kalkpaint

Kalklitir's powdered lime paint from Belgium. Mixed with water and applied in two coats with the dedicated brush, it gives a matte wall with natural brush patterns.


01

Lime Plaster

deFarang Lime Plaster

deFarang was the first to introduce lime plaster in Korea, and develops its materials with unmatched application experience and know-how.

A ready-mixed plaster that adapts the lime plaster long used in Europe to Korea's seasons and site conditions. Natural, hand-built texture adds depth to any space.

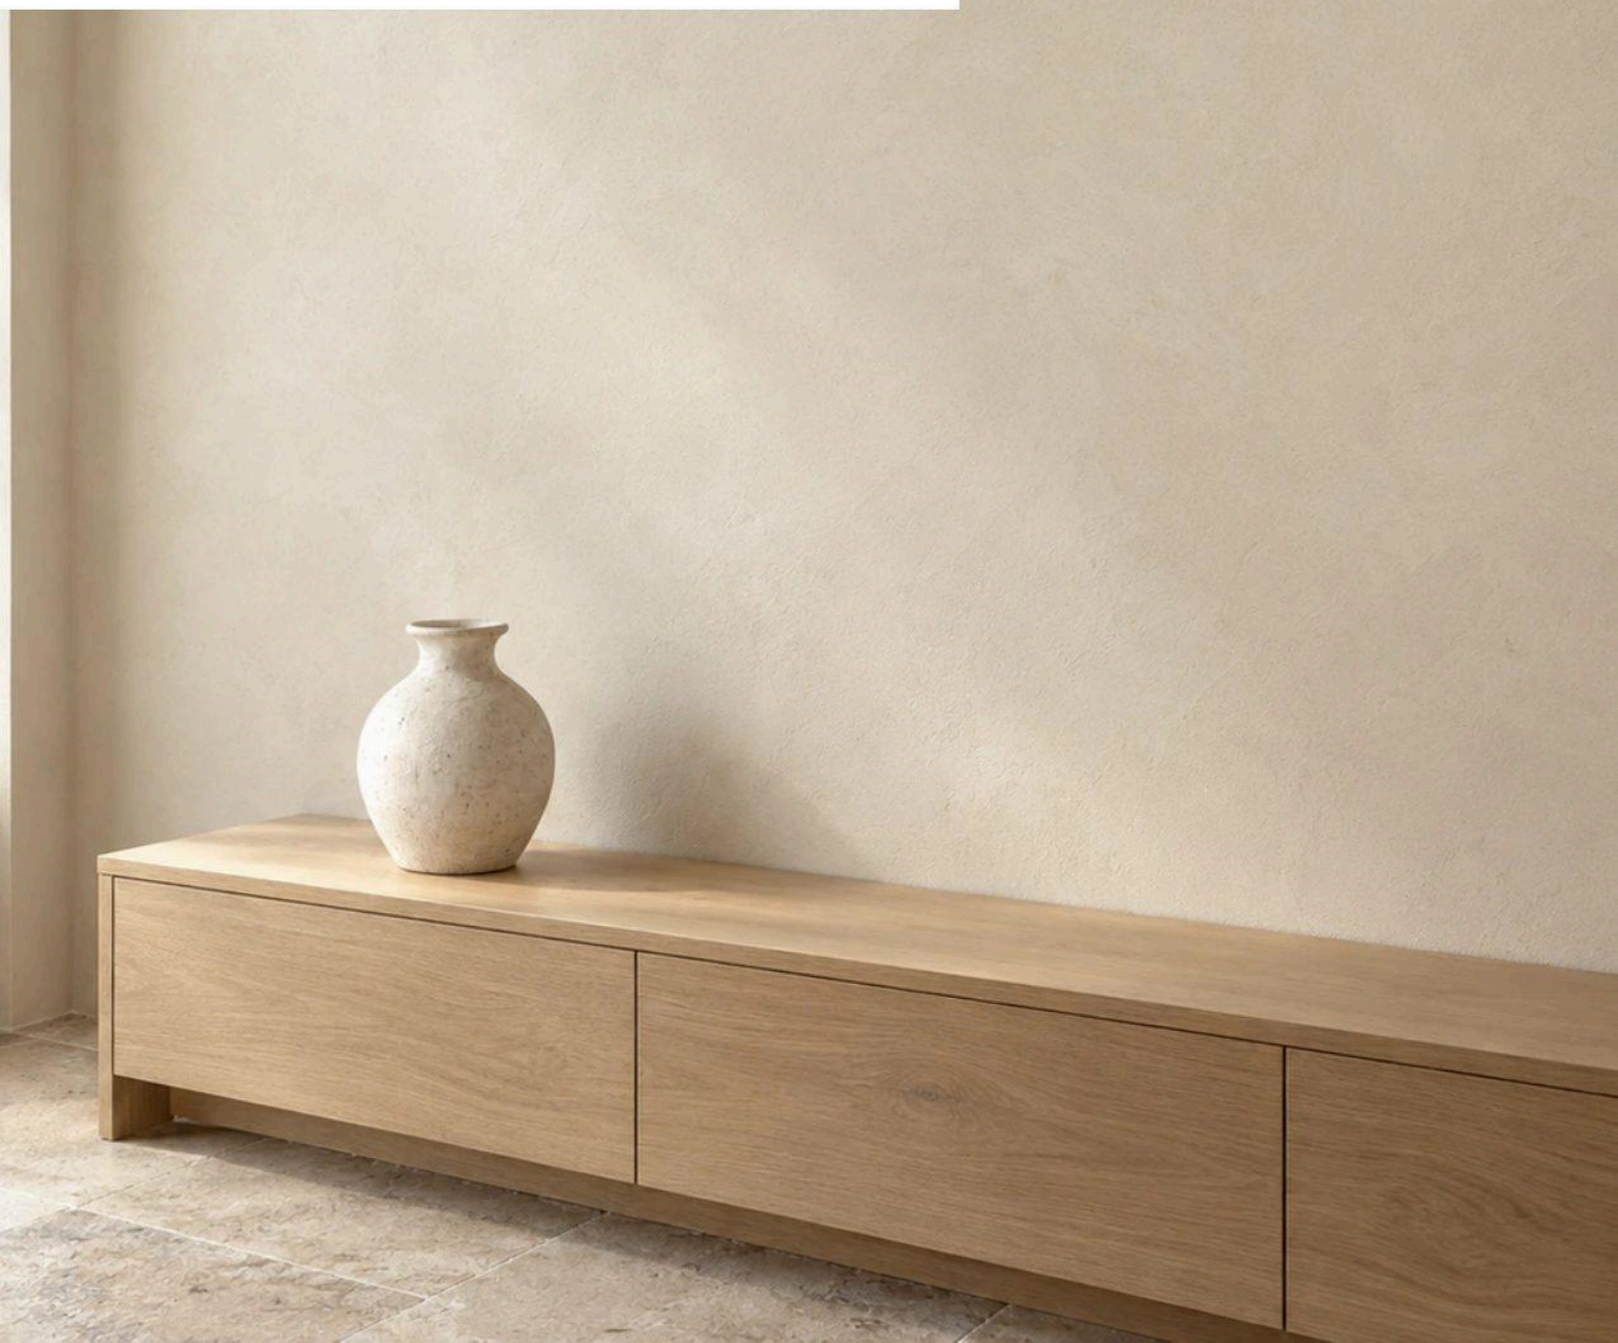

01

Fine Texture

deFarang Lime Plaster *Fine Grain*





Materials & order of use

1	**Lime Plaster Primer** Surface prep	→ 2	Lime Plaster Fine Grain + tint with pigment	→ 3 **Wall coating** Optional

Soft, with a fine grain.

Easy to apply with a brush or trowel — ideal for DIY.

Brush · Trowel

2026 renewal — a brighter ivory base

Recommended for	Homes, bedrooms and other calm spaces
Surfaces	Gypsum board · MDF · cement (primer ×1) Plywood · silk wallpaper · tile · coated surfaces (primer ×2)
Pack sizes	Paste, 5kg · 10kg
Coverage	12–14㎡ per 10kg (varies with thickness)
Primer	Lime Plaster Primer
Pigment	1 pack per 10kg · colour differs slightly from earlier batches after the renewal
Tools	Brush, trowel, spatula
Steps	Primer → mix & tint → apply thinly, max. 2mm per coat One coat is standard · for a rougher look, recoat once dry
Drying	Surface dry in approx. 3–4 h (normal use possible) Primer: dry for 3 h or more before applying
Curing	Full cure in approx. 4–7 days · colour deepens subtly once dry
Finish	Indoors usually no coating · coat only areas exposed to water or stains

02

Coarse Texture

deFarang Lime Plaster *Coarse Grain*





Materials & order of use

1	→	2	→	3
Lime Plaster Primer		Lime Plaster Coarse Grain		**Wall coating**
Surface prep		+ tint with pigment		Optional

Rough, with deep texture.

A trowel brings out a sculpted grain that adds depth to a space.

Trowel · Spatula

Recommended for	Shops, cafés, feature walls
Surfaces	Gypsum board · MDF · cement (primer ×1) Plywood · silk wallpaper · tile · coated surfaces (primer ×2)
Pack sizes	Paste, 5kg · 10kg
Coverage	8–10㎡ per 10kg (varies with thickness)
Primer	Lime Plaster Primer
Pigment	1–2 packs per 10kg · a tint test is essential
Tools	Trowel, spatula
Steps	Primer → mix & tint → apply thinly, max. 2mm per coat One coat is standard · for a rougher look, recoat once dry
Drying	Surface dry in approx. 3–4 h (normal use possible) Primer: dry for 3 h or more before applying
Curing	Full cure in approx. 4–7 days · colour deepens subtly once dry
Finish	Indoors usually no coating · coat only areas exposed to water or stains

03

Floor

deFarang Floor *for floors & exteriors*





Materials & order of use

1 **Lime Plaster Primer** — Surface prep → 2 **deFarang Floor** — + tint with pigment → 3 **Coating**

Floors and exteriors — even where water reaches.

No cracking even when applied thickly — for floors, exterior walls and textured walls.

Trowel

Recommended for	Floors, exterior walls, bathrooms, kitchens · textured walls
Contents	Powder (white) 13.3kg + liquid 4.7kg Includes 400g beige mineral pigment
Coverage	12–15㎡ per set
Primer	Lime Plaster Primer
Pigment	2 packs per set · a tint test is essential
Tools	Trowel
Steps	Base prep → primer → mix liquid & powder 3+ min → tint test → apply with trowel → sand if needed → coat
Drying	Approx. 3–5 hours after application
Caution	Weak floors need mesh first · do not store once mixed

It all starts *with primer*

04



Lime Plaster Primer

The first step in preparing the surface before plastering. It roughens the surface so the plaster bonds well.

Surfaces	Required on all surfaces · gypsum board · MDF · cement ×1 Plywood · silk wallpaper · tile · coated surfaces ×2
Pack sizes	2kg · 5kg · 10kg, liquid
Coverage	30–35㎡ per 10kg (one coat)
Tools	Brush, roller
How to use	Shake well, apply with no gaps · dilute with up to 3% water if needed
Drying	3+ hours on average, until dry to the touch
Caution	Cannot be replaced by an ordinary paint primer (sealer)
Storage	Reusable if sealed · keep from freezing

Materials & order of use

1 **Lime Plaster Primer**
Regular surfaces ×1 · slippery surfaces ×2

→ 2 **Plaster + pigment**
Coarse · Fine · Floor

→ 3 **Coating**
Optional



Lime Plaster tool set

Tray, roller, brush, urethane spatula, putty board, etc. (trowel sold separately)



Paint tool set


Tray, roller, brush, masking tape, cover film, gloves



Trowel 0.3T

Wooden-handle trowel, 21.2cm × 6.5cm


Pigments *& space*

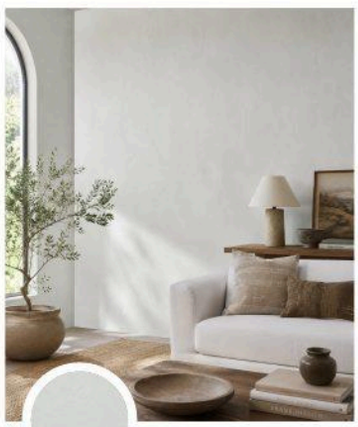

White



Beige

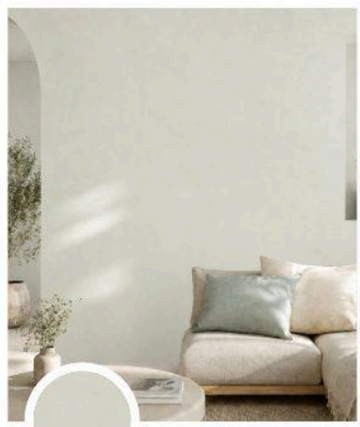

Mint



Yellow Brown



Orange Brown




Gold Brown




Pink Brown




Brown

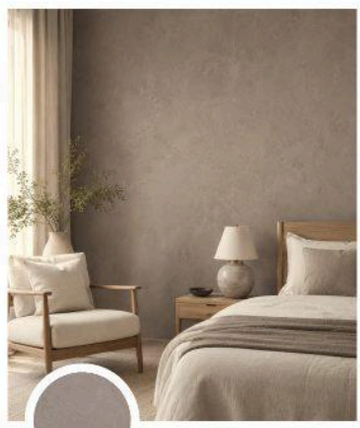

Dark Brown

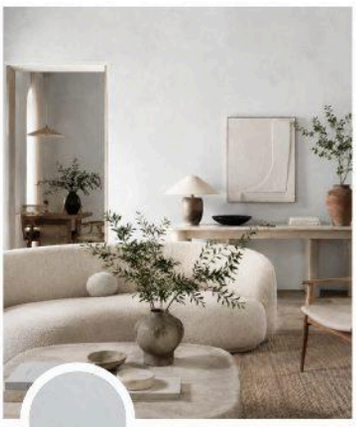

Blue Gray

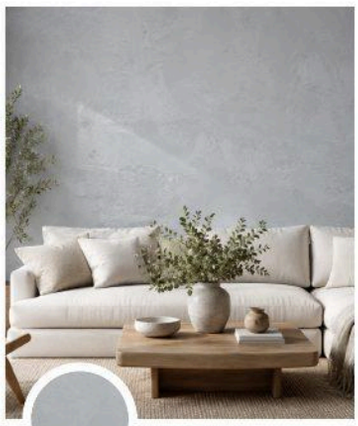

Gray




Navy




Black



Wine

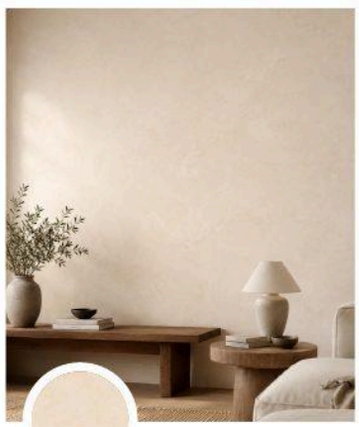

Baby Pink

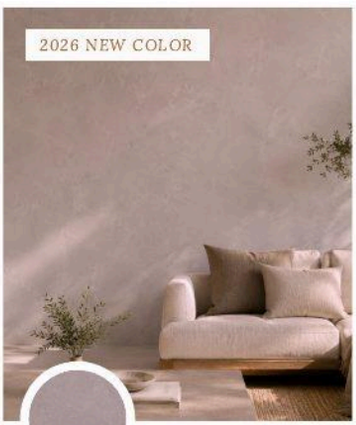


Concrete

Inorganic Pigment — 12 colours




Royal Blue | Blue | Italian Green | Daisy Yellow | Lime | Vintage Green

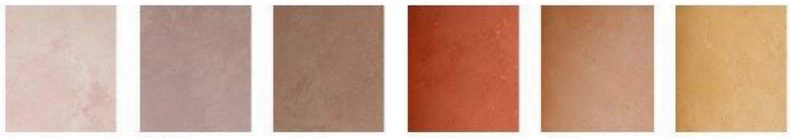

Rose Red | Lilac | Coral Pink | Brick Red | Peach | Apricot

* Printed colours may differ from the actual colours. Coarse and Fine Grain have different base colours, so the same pigment gives slightly different results — please check exact colours with showroom samples. Room photos are images showing the feel of each pigment; inorganic pigment swatches are enlarged from the walls in the photos.

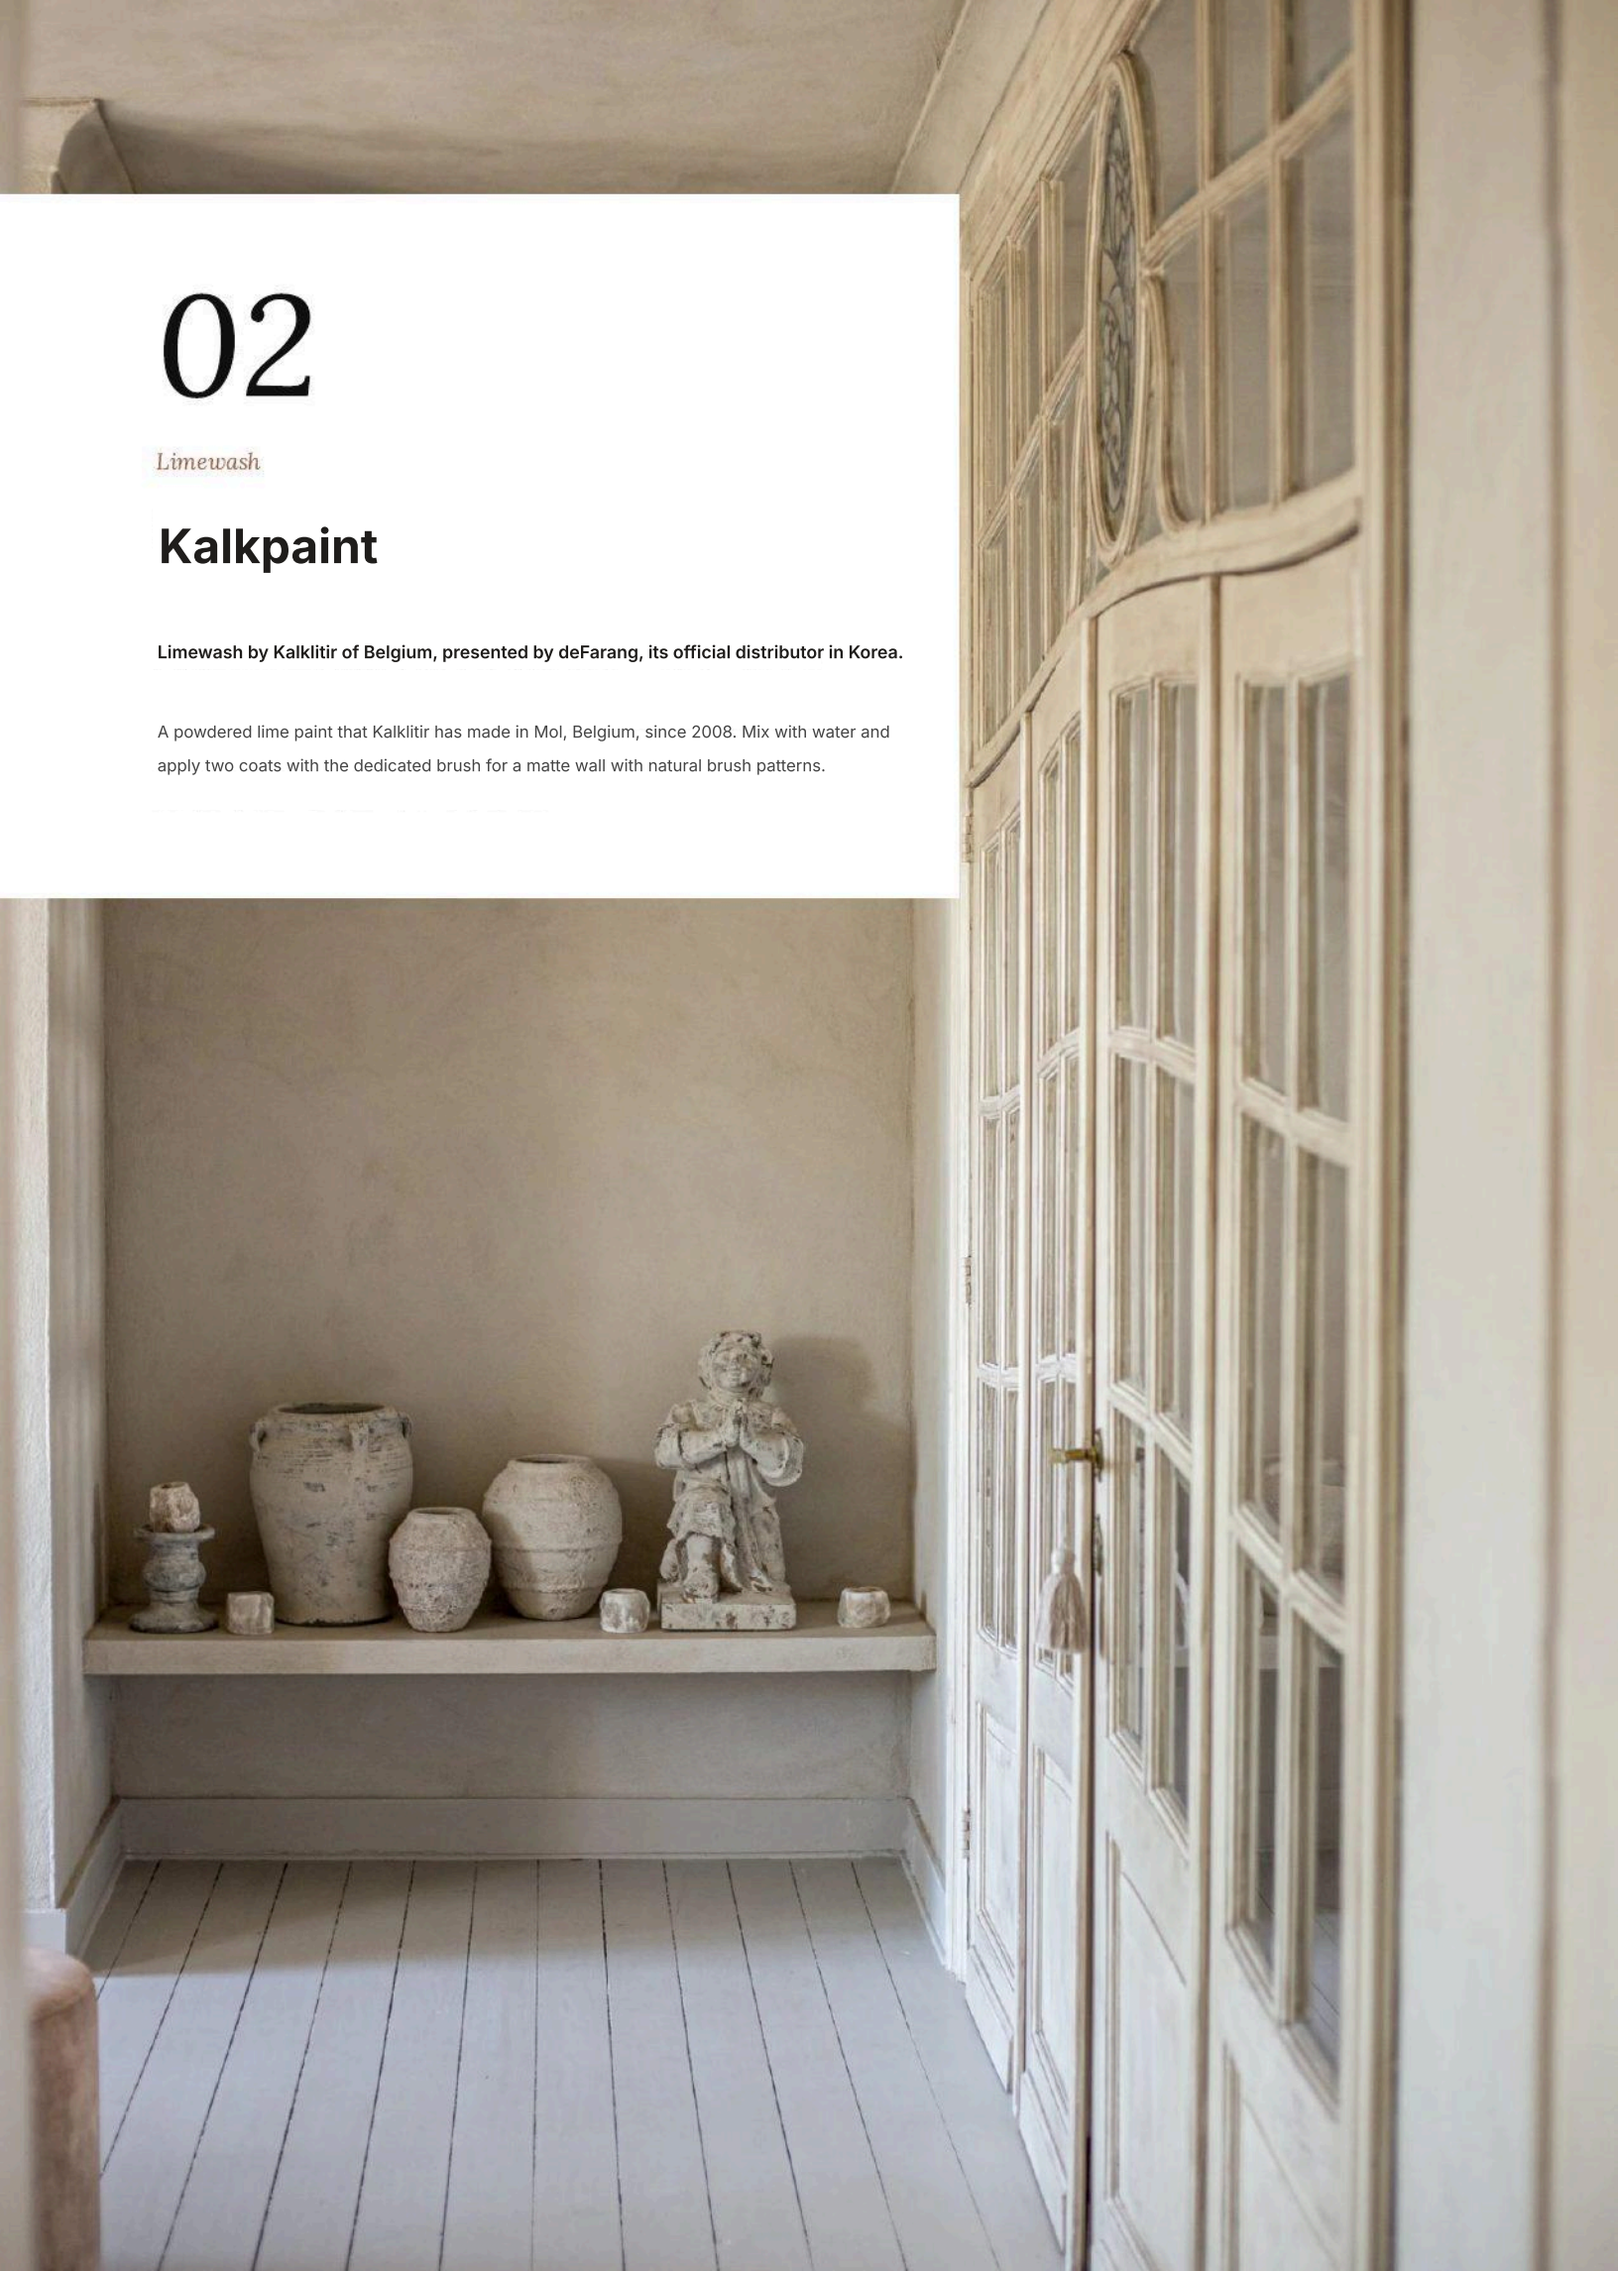

02

Limewash

Kalkpaint


Limewash by Kalklitir of Belgium, presented by deFarang, its official distributor in Korea.

A powdered lime paint that Kalklitir has made in Mol, Belgium, since 2008. Mix with water and apply two coats with the dedicated brush for a matte wall with natural brush patterns.

Limewash, *applied by brush*



→

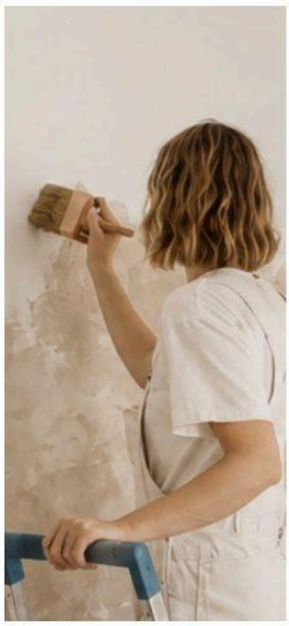

→





1 *Primer*

Kalkpaint Primer

Size	500g
Mixing	Product 1 : water 1.2
Coverage	12㎡ per coat
Coated areas	2 coats

2 *Kalk Paint*

Kalkpaint

Size	500g · 1kg · 60g sample
Mixing	Product 1 : water 1.7
Coverage	12㎡ per 1kg, 2 coats
Use	Interior walls & ceilings

3 *Coating* Optional

deFarang Wall Coating

Type	Optional
Use	Protective finish where water or stains are frequent
Note	Touch-ups are difficult after coating

+ *Brush* Tool

Kalkpaint Brush

Material	Natural fibre
Size	7.5 × 10 × 3cm
Origin	Belgium
Use	Primer and Kalkpaint application

MIX — mixing & coverage


Kalkpaint 1kg Powder	+	**Water 1.7L** Product 1 : water 1.7	→	**2 coats** 2nd coat once the 1st is dry	→	**approx. 12㎡** ±20%
Kalkpaint Primer 500g Powder	+	**Water 600ml** Product 1 : water 1.2	→	**1 coat** Coated surfaces: 2 coats	→	**approx. 12㎡** Per coat

* Coverage may vary by ±20% depending on conditions and method.


Kalkpaint *colours* **& spaces**




Ivory

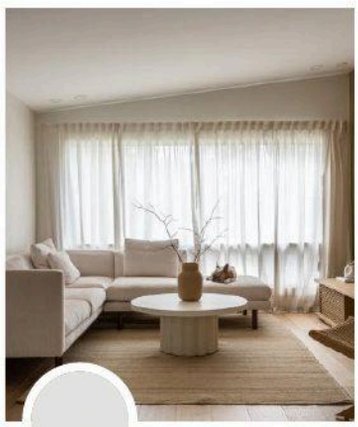


Crema

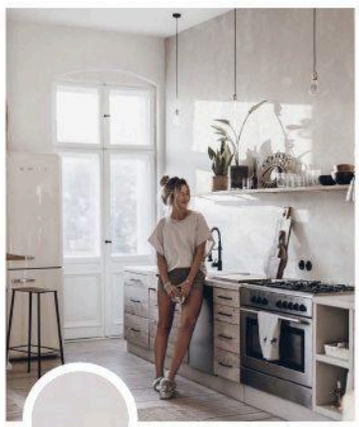

Palladio

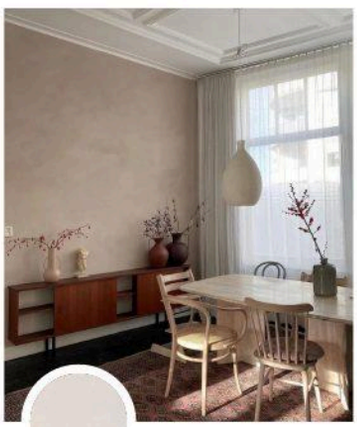


Elle

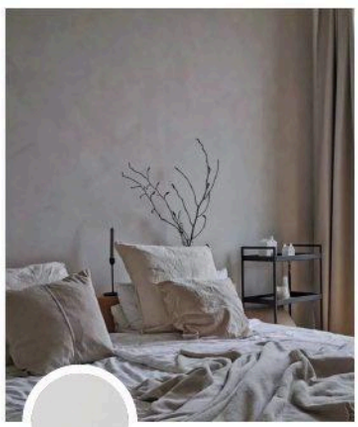


Nudo Grigio




Ecru

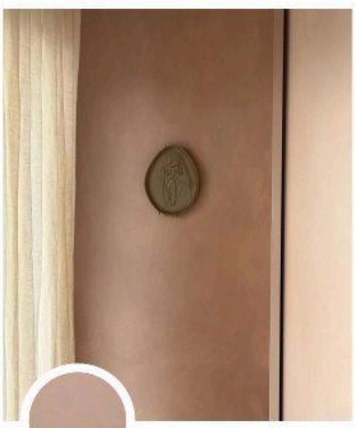


Clay

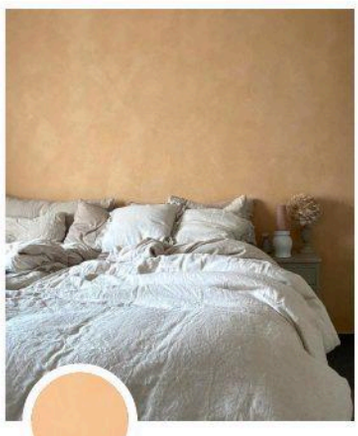


Brief

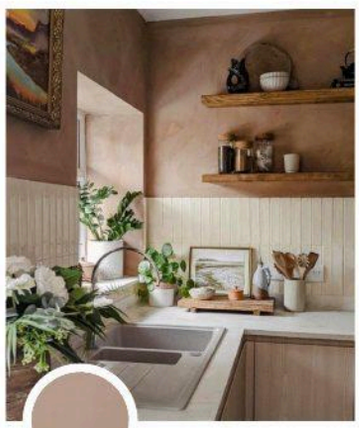

Terracotta

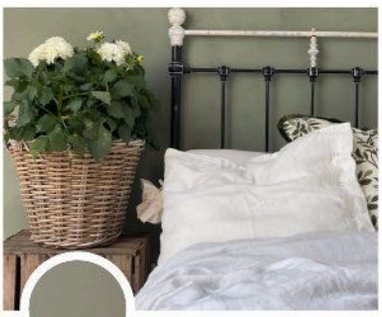


Forest

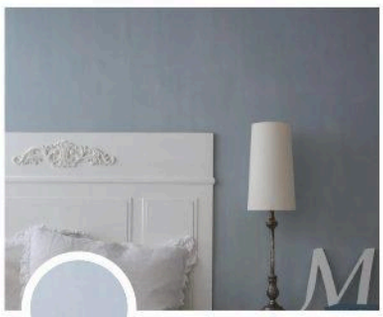

Antique Blue




Peppercorn

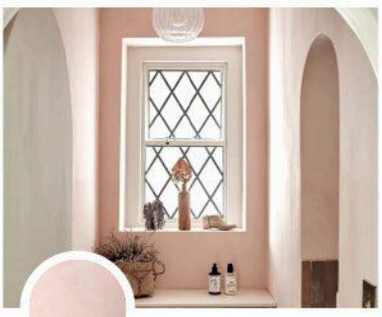


Roseto



Sylvie

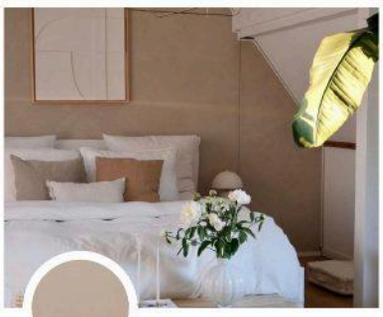

Noce

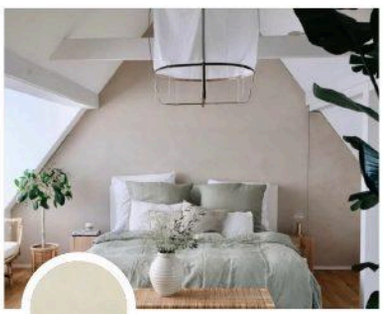


Calce



Aaida Primo



Mare

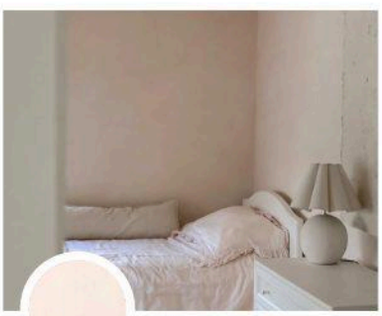

Alizes



Colour Chips

19 real colour chips

Check colours first with colour chips or a 60g sample. Use a single colour, mix two or three, or layer them.

Technical — Kalk Paint Application

How to apply **& coating**

The same colour looks different depending on brush direction and layering. Instead of a uniform surface, the wall keeps natural brush patterns.







01

Primer

On wallpaper, gypsum board or plastered walls, apply the dedicated primer first, mixed 1 : 1.2 with water. Coated surfaces need 2 coats.

02

Mixing with water

Add the powder to water and mix until smooth, with no lumps. Product 1 : water 1.7 (1.7L per 1kg).

03

First coat

Using the dedicated brush, change direction and apply in broad X strokes. The brush marks become the pattern.

04

Second coat

Apply once the first coat is completely dry — fast in summer, slow in winter. The colour stays the same while the brush pattern settles and softens.

deFarang Wall Coating

Type	Optional. Recommended where water or stains are frequent
Timing	After the last coat is completely dry
Note	Touch-ups are difficult after coating. Apply after checking colour and pattern carefully.

Primer · Brush · Samples

Kalk primer	500g. Product 1 : water 1.2, 12㎡ per coat (coated surfaces ×2)
Brush	Natural fibre, 7.5 × 10 × 3cm, made in Belgium
19 colour chips	See all 19 colours in their real tone and pattern
60g sample	Water 110ml, 0.7㎡ for 2 coats
Colour when dry	Looks darker and patchy right after application. Judge the colour once fully dry.
Video guides	YouTube “유럽미장TV” and the deFarang website

* Check pack sizes and prices on deFarang's Naver Smart Store, or contact us.

Technical — Application

Application steps & *surfaces*

01
Check the surface

Repair dents, cracks and contaminants. Treat uneven areas with putty first, and mask areas not being finished.

02
Lime Plaster Primer

Shake before use and apply with a brush or roller with no gaps. Dry for 3+ hours on average, until dry to the touch.

03
Mixing & tinting

Mix with a stirrer or gloved hands until there are no lumps. Adjust consistency with up to 5% water if needed, and test the colour thinly on the surface.

04
First coat

Press onto the wall with a trowel or spatula, max. 2mm per coat. On a natural-material base, applying too thickly can cause cracks.

05
Recoat if needed

Most finishes need just one coat. For a rougher texture, add one more coat once fully dry to create layers.

06
Finish

Wall coating is optional — recommended only where stains are frequent. Touch-ups are difficult after coating.

Section — cross-section



Top coat	Optional. Recommended where stains are frequent
Recoat (optional)	Only for a rougher texture — recoat once dry to create layers
Plaster, 1 coat	Max. 2mm · one coat for most finishes
Lime Plaster Primer	Regular surfaces ×1, slippery surfaces ×2
Substrate	Treat uneven areas with putty first

** Surface preparation guide*


Surface	Primer	Preparation
Gypsum board	×1	Full-coat jointing putty recommended
MDF	×1	Full-coat jointing putty recommended
Plywood	×2	Apply oil-based paint or sealer first (prevents water stains); this makes it a coated surface, so primer ×2
Cement	×1	Repair dents and cracks
Silk wallpaper	×2	Remove old wallpaper entirely; glue down lifted edges. Floating installation may crack later
Tile, coated	×2	Apply one coat, let dry, then one more
Silicone, corners	×1	Cover with paintable silicone or treat the edges
Deep holes	—	Fill nail holes etc. with putty

Application temperature is 5–36°C; do not work below 5°C. See YouTube “유럽미장TV” and the application guide on the deFarang website for details.

Product *comparison* & quantities

Item	Lime Plaster — Coarse	Lime Plaster — Fine	deFarang Floor — floors & exteriors	Kalkpaint
Form	Paste, 5kg · 10kg	Paste, 5kg · 10kg	Powder + liquid, 18kg set	Powder, 500g · 1kg
Texture	Rough texture	Soft, fine texture	Plaster finish for floors & exteriors	Matte finish with brush patterns
Tools	Trowel, spatula	Brush, trowel, spatula	Trowel	Kalkpaint brush
Recommended for	Shops, cafés, feature walls	Homes, bedrooms, calm spaces	Floors, exterior walls, bathrooms, kitchens	Interior walls & ceilings
Coverage	8–10㎡ per 10kg	12–14㎡ per 10kg	12–15㎡ per set	6㎡ per 500g, 2 coats
Base colour	Beige, tint with pigment	Ivory, tint with pigment	Pure white, tint with pigment	Choose from 19 colours
Primer	Lime Plaster Primer, 1–2 coats	Lime Plaster Primer, 1–2 coats	Lime Plaster Primer, 1–2 coats	Kalkpaint Primer
Thickness · coats	Max. 2mm per coat	Max. 2mm per coat	No cracking even when thick	2 coats, 2nd once the 1st is dry
Finish	Indoors: no coating needed	Indoors: no coating needed	Sand if needed	Coat only where water or stains are frequent

Quantity guide · based on 30㎡

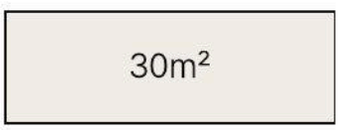

Width 12m × height 2.5m

Wall width (m) × Ceiling height (m) = Area (㎡)

Calculate the area to be finished before ordering. Below are the quantities needed for 30㎡; light icons show the extra amount when including a margin.

Lime Plaster Primer	30–35㎡ per 10kg (1 coat)		*10kg × 1 · 2-coat surfaces × 2*
Lime Plaster — Coarse	8–10㎡ per 10kg		*10kg × 3–4*
Lime Plaster — Fine	12–14㎡ per 10kg		*10kg × 3*
deFarang Floor	12–15㎡ per set (18kg)		*2–3 sets*
Kalkpaint	12㎡ per 1kg, 2 coats		*1kg × 3 (2 coats, ±20%)*
Kalkpaint Primer	12㎡ per 500g, 1 coat		*500g × 3*

* Coverage and drying times follow the product instructions and vary with substrate, thickness, temperature and humidity. Quantities for 30㎡ use the standard coverage range. Slippery surfaces such as silk wallpaper or tile need 2 coats of primer.

* Unopened, undamaged products left over after application can be refunded within 14 days.

deFarang

defarang.co.kr

Dealer inquiries · Product information